

Saudi Aluminium Spacer Factory

(For Double Glazed)

Prop. : Abdul Sattar S. Al-Ibrahim

C.R. 2050032835

Industrial Licence No. 559/S

Membership No. : 33921



المصنع السعودي لفواصل الألومنيوم

للزجاج العازل المزدوج


لصاحبه : عبد الستار صالح الابراهيم

س.ت. ٢٠٥٠٠٣٢٨٣٥

ترخيص صناعي ٥٥٩ / ص

رقم العضوية : ٣٣٩٢١

Norfix® V1200

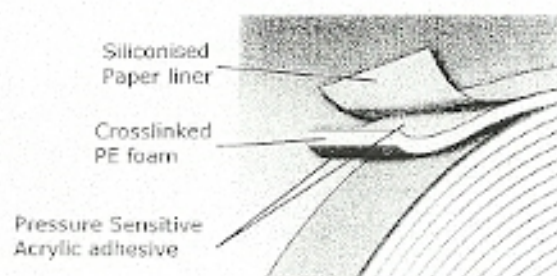

Norfix® V1200

General purpose lower cost acrylic adhesive tape providing excellent tack and peel performance with good environmental resistance. The product has been designed for both internal and external applications where a degree of security is required in the bond.

The foam is a high quality Polyolefin with excellent dimensional tolerances, a high degree of colour stability and excellent key to the adhesive surface. The thickness and density range has been chosen to offer a conformable product for uneven, irregular or contoured materials.

The acrylic adhesive combines excellent tack and peel performance and has been chosen to offer a high degree of adhesion to a wide range of surfaces. Norfix® V1200 will not offer good temperature resistance or shear performance so is unsuitable for challenging applications or ones involving high loading.

The product is generally available as a white double sided tape in thickness from 0.5mm to 2.0mm, protected by a siliconised glassine paper liner. Single sided products may be available upon request subject to reasonable MOQ's.

General Purpose PE foam bonding tape with acrylic adhesive

Features / Benefits

- Competitive product for less critical applications
- U.V. resistant acrylic adhesive
- Particularly suitable for diecutting purposes

Applications

- Interior or exterior use
- General purpose bonding applications
- Good adhesion to a wide range of rigid plastic surfaces



SAINT-GOBAIN
PERFORMANCE PLASTICS