



Date
June 29, 2006

Our reference
TC-BRF-06-19876/mso

Page
2/2

Test results:

Standard moisture adsorption capacity according to EN 1279-2, B.4 (23°C / 32% RH).


Volatile content according to EN 1279-6, G.1 (70°C).

For each measurement three samples were taken from the specimen molecular sieve.

The results of the measurements:

	Sample 1	Sample 2	Sample 3
Initial moisture loading [%]	1.7	1.7	1.7
Standard moisture capacity [%]	22.7	22.7	22.7
Volatile content [%]	< 0.5	< 0.5	< 0.5

Loading curve:

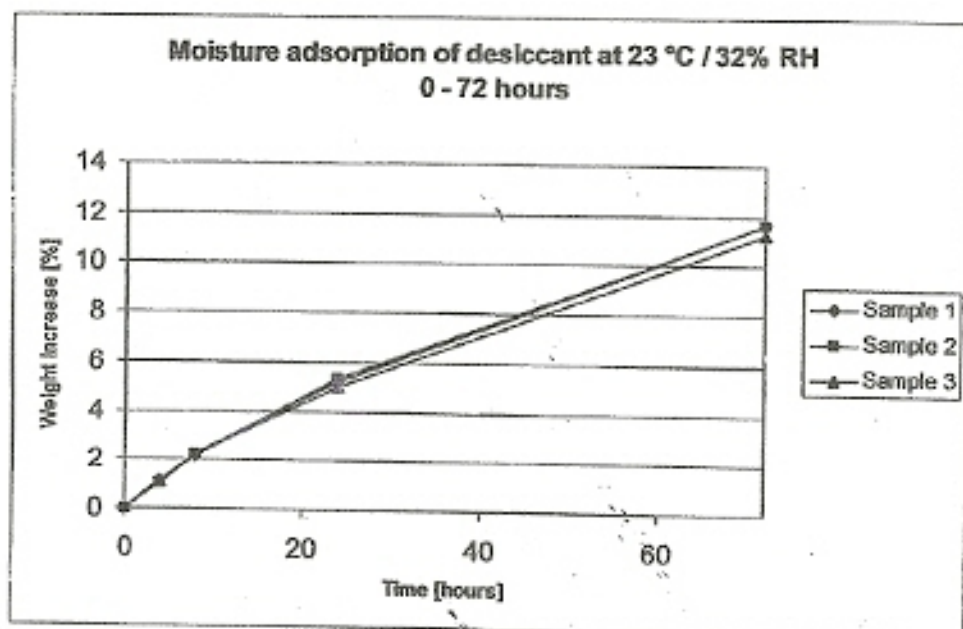

Yours faithfully,

Eindhoven, June 2006

R. de Bode
Author

TNO Science and Industry
Business Unit Testing & Consultancy

K.K. Pahnke, M.Sc.
Head of Department